


SS6200 系列

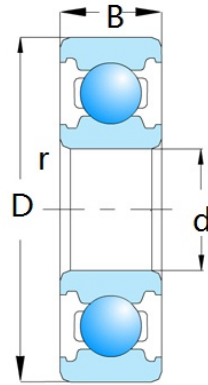

select	Inquiry	型号	d(mm)	D(mm)	B(mm)	动态载 荷(KN)	静态载 荷(KN)	极限速 度(r/min) (脂)	极限速 度(r/min) (油)	重 量(g)
S625	5	16	5	1.75	0.67	40000	49000	0.005		
ZZ/2RS										
S626	6	19	6	2.6	1.05	35000	43000	0.008		
ZZ/2RS										
S627	7	22	7	3.3	1.35	31000	37000	0.013		
ZZ/2RS										
S628	8	24	8	3.35	1.4	28000	35000	0.018		
ZZ/2RS										
S629	9	26	8	4.45	2	27000	33000	0.02		
ZZ/2RS										
S6200	10	30	9	5.1	2.38	20000	26000	0.032		
ZZ/2RS										
S6201	12	32	10	6.82	3.05	19000	24000	0.037		
ZZ/2RS										
S6202	15	35	11	7.65	3.72	18000	22000	0.045		
ZZ/2RS										
S6203	17	40	12	9.58	4.78	16000	20000	0.065		
ZZ/2RS										
S6204	20	47	14	12.8	6.65	14000	18000	0.106		
ZZ/2RS										
S6205	25	52	15	14	7.88	12000	15000	0.128		
ZZ/2RS										
S6206	30	62	16	19.5	11.5	9500	13000	0.2		
ZZ/2RS										

SS6200 系列

S6207 ZZ/2RS	35	72	17	25.5	15.2	8500	11000	0.288
S6208 ZZ/2RS	40	80	18	29.5	18	8000	10000	0.37
S6209 ZZ/2RS	45	85	19	31.5	20.5	7000	9000	0.42
S6210 ZZ/2RS	50	90	20	35	23.2	6700	8500	0.47
S6211 ZZ/2RS	55	100	21	43.2	29.20	6000	7500	0.6
S6212 ZZ/2RS	60	110	22	47.8	32.8	5600	7000	0.78
S6213 ZZ/2RS	65	120	23	57.2	40	5000	6300	0.99
S6214 ZZ/2RS	70	125	24	60.8	45	4800	6000	1.05
S6215 2RS	75	130	25	66	49.5	4500	5600	1.18
S6216 2RS	80	140	26	71.5	54.2	4300	5300	1.38
S6217 2RS	85	150	28	83.2	63.8	4000	5000	1.8
S6218 2RS	90	160	30	95.8	71.5	3800	4800	2.18
S6219 2RS	95	170	32	110	82.8	3600	4500	2.62
S6220 2RS	100	180	34	122.00	92.80	3400	4300	3.2000
S6222	110	200	38	144	117	3000	3800	4.42
S6224	120	215	40	155	131	2600	3400	5.3