


# 16 Series

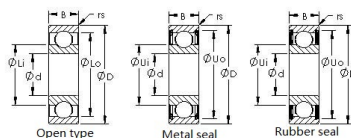

select	Inquiry	Bearing Number	Dimensions			Basic Load Rating	
			d	D	B	Cr(N)	Cor(N)
1601	4.763 mm	17.463 mm	6.35 mm	600	220		
1601 2rs	4.763 mm	17.463 mm	7.938 mm	600	220		
1601zz	4.763 mm	17.463 mm	6.35 mm	600	220		
1602	6.35 mm	17.463 mm	6.35 mm	635	240		
1602 2rs	6.35 mm	17.463 mm	7.938 mm	635	240		
1602zz	6.35 mm	17.463 mm	6.35 mm	635	240		
1603	7.938 mm	22.225 mm	7.142 mm	745	310		
1603 2rs	7.938 mm	22.225 mm	8.733 mm	745	310		
1603zz	7.938 mm	22.225 mm	7.142 mm	745	310		
1604	9.525 mm	22.225 mm	7.142 mm	750	320		
1604 2rs	9.525 mm	22.225 mm	8.733 mm	750	320		
1604zz	9.525 mm	22.225 mm	7.142 mm	750	320		
1605	7.938 mm	23.017 mm	7.938 mm	745	315		
1605 2rs	7.938 mm	23.017 mm	7.938 mm	745	315		
1605zz	7.938 mm	23.017 mm	7.938 mm	745	315		
1606	9.525 mm	23.017 mm	7.938 mm	750	320		
1606 2rs	9.525 mm	23.017 mm	7.938 mm	750	320		
1606zz	9.525 mm	23.017 mm	7.938 mm	750	320		
1607	11.113 mm	23.017 mm	7.938 mm	1015	430		
1607 2rs	11.113 mm	23.017 mm	7.938 mm	1015	430		
1607zz	11.113 mm	23.017 mm	7.938 mm	1015	430		

16 Series

1614	9.525 mm	28.575 mm	9.525 mm	1140	520
1614 2rs	9.525 mm	28.575 mm	9.525 mm	1140	520
1614zz	9.525 mm	28.575 mm	9.525 mm	1140	520
1615	11.113 mm	28.575 mm	9.525 mm	1145	530
1615 2rs	11.113 mm	28.575 mm	9.525 mm	1145	530
1615zz	11.113 mm	28.575 mm	9.525 mm	1145	530
1616	12.7 mm	28.575 mm	9.525 mm	1150	450
1616 2rs	12.7 mm	28.575 mm	9.525 mm	1150	450
1616zz	12.7 mm	28.575 mm	9.525 mm	1150	450