


## SS6000 Series

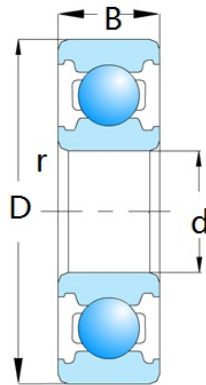

select	Inquiry	Bearing No.	d(mm)	D(mm)	B(mm)	Dynamic Load Rating(KN)	Static Load Rating(KN)	Speed Limit(r/min) (Grease)	Speed Limit(r/min) (Oil)	Weight(kg)
S607	7	19	6	2.6	1.05	40000	47000	0.0076		
ZZ/2RS										
S608	8	22	7	3.3	1.35	34000	41000	0.012		
ZZ/2RS										
S609	9	24	7	3.35	1.4	33000	40000	0.015		
ZZ/2RS										
S6000	10	26	8	4.58	1.98	22000	30000	0.019		
ZZ/2RS										
S6001	12	28	8	5.1	2.38	20000	26000	0.022		
ZZ/2RS										
S6002	15	32	9	5.58	2.85	19000	24000	0.03		
ZZ/2RS										
S6003	17	35	10	6	3.25	17000	21000	0.039		
ZZ/2RS										
S6004	20	42	12	9.38	5.02	16000	19000	0.069		
ZZ/2RS										
S6005	25	47	12	10	5.85	13000	17000	0.08		
ZZ/2RS										
S6006	30	55	13	13.2	8.3	11000	14000	0.116		
ZZ/2RS										
S6007	35	62	14	16.2	10.5	9500	12000	0.155		
ZZ/2RS										
S6008	40	68	15	17	11.8	9000	11000	0.19		
ZZ/2RS										
S6009	45	75	16	21	14.8	8000	10000	0.23		
ZZ/2RS										
S6010	50	80	16	22	16.2	7000	9000	0.28		
ZZ/2RS										
S6011	55	90	18	30.2	21.8	7000	8500	0.362		
ZZ/2RS										

## SS6000 Series

S6012 ZZ/2RS	60	95	18	31.5	24.2	6300	7500	0.039
S6013 ZZ/2RS	65	100	18	32	24.8	6000	7000	0.42
S6014 ZZ/2RS	70	110	20	38.5	30.5	5600	6700	0.57
S6015 ZZ/2RS	75	115	20	40.2	33.2	5300	6300	0.64
S6016 ZZ/2RS	80	125	22	47.5	39.8	5000	6000	0.83
S6017 2RS	85	130	22	50.8	42.8	4500	5600	0.86
S6018 2RS	90	140	24	58	49.8	4300	5300	1.1
S6019 2RS	95	145	24	57.8	50	4000	5000	1.18
S6020 2RS	100	150	24	64.5	56. 20	3800	4800	1.25
S6021 2RS	105	160	26	71.8	63.2	3600	4500	1.52
S6022 2RS	110	170	28	81.8	72.8	3400	4300	1.87
S6024 2RS	120	180	28	87.5	79.2	3000	3800	2
S6026 2RS	130	200	33	105	96.8	2800	3600	3.08
S6028 2RS	140	210	33	116	108	2400	3200	3.17
S6030 2RS	150	225	35	132	125	2200	3000	3.903