


## SS6300 Series

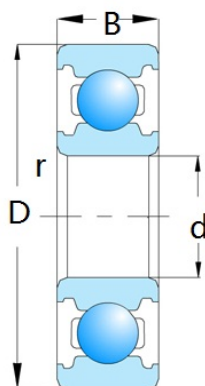

select	Inquiry	Bearing No.	d(mm)	D(mm)	B(mm)	Dynamic Load Rating(KN)	Static Load Rating(KN)	Speed Limit(r/min) (Grease)	Speed Limit(r/min) (Oil)	Weight(kg)
S635	5	ZZ/2RS	19	6	2.6	1.05	35000	43000	0.0085	
S636	6	ZZ/2RS	22	7	3.3	1.35	31000	37000	0.013	
S637	7	ZZ/2RS	26	9	4.55	1.95	26000	32000	0.024	
S638	8	ZZ/2RS	28	9	4.55	1.95	26000	32000	0.029	
S6300	10	ZZ/2RS	35	11	7.65	3.48	18000	24000	0.053	
S6301	12	ZZ/2RS	37	12	9.72	5.08	17000	22000	0.06	
S6302	15	ZZ/2RS	42	13	11.5	5.42	16000	20000	0.082	
S6303	17	ZZ/2RS	47	14	13.5	6.58	15000	18000	0.115	
S6304	20	ZZ/2RS	52	15	15.8	7.88	13000	16000	0.142	
S6305	25	ZZ/2RS	62	17	22.2	11.5	10000	14000	0.232	
S6306	30	ZZ/2RS	72	19	27	15.2	9000	11000	0.35	
S6307	35	ZZ/2RS	80	21	33.4	19.2	8000	9500	0.45	
S6308	40	ZZ/2RS	90	23	40.8	24	7000	8500	0.63	
S6309	45	ZZ/2RS	100	25	52.8	31.8	6300	7500	0.83	
S6310	50	ZZ/2RS	110	27	61.8	38.8	6000	7000	1.08	

## SS6300 Series

S6311 ZZ/2RS	55	120	29	71.5	44.8	5600	6700	1.37
S6312 ZZ/2RS	60	130	31	81.5	51.8	5000	6000	1.71
S6313 ZZ/2RS	65	140	33	93.8	60.5	4500	5300	2.1
S6314 2RS	70	150	35	105	68	4300	5000	5.6
S6315 2RS	75	160	37	113	76.8	4000	4800	3.05
S6316 2RS	80	170	39	123	86.5	3800	4500	3.62