


SS6900 Series

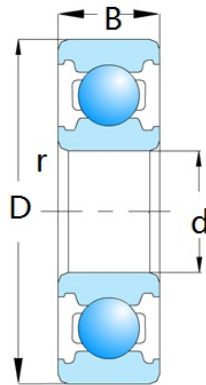

select	Inquiry	Bearing No.	d(mm)	D(mm)	B(mm)	Dynamic Load Rating(KN)	Static Load Rating(KN)	Speed Limit(r/min) (Grease)	Speed Limit(r/min) (Oil)	Weight(kg)
S696	6	ZZ/2RS	15	5	1.48	0.6	32000	40000	0.0045	
S697	7	ZZ/2RS	17	6	1.6	0.71	30000	38000	0.0053	
S698	8	ZZ/2RS	19	6	2.25	0.92	28000	36000	0.0072	
S699	9	ZZ/2RS	20	6	2.45	1.05	27000	34000	0.0075	
S6900	10	ZZ/2RS	22	6	2.7	1.3	25000	32000	0.009	
S6901	12	ZZ/2RS	24	6	2.9	1.5	22000	28000	0.011	
S6902	15	ZZ/2RS	28	7	4.3	2.3	20000	26000	0.017	
S6903	17	ZZ/2RS	30	7	4.6	2.6	19000	24000	0.018	
S6904	20	ZZ/2RS	37	9	6.4	3.7	17000	22000	0.036	
S6905	25	ZZ/2RS	42	9	7	4.55	16000	19000	0.041	
S6906	30	ZZ/2RS	47	9	7.25	5	14000	17000	0.045	
S6907	35	Z7/2RS	55	10	10.9	7.75	12000	14000	0.073	
S6908	40	ZZ/2RS	62	12	13.7	9.95	11000	13000	0.112	
S6909	45	ZZ/2RS	68	12	14.1	10.9	8500	11000	0.123	
S6910	50	ZZ/2RS	72	12	14.5	11.7	8000	9500	0.138	

SS6900 Series

S6911 ZZ/2RS	55	80	13	15.9	13.2	7500	9000	0.17
S6912 ZZ/2RS	60	85	13	16.4	14.2	6700	8000	0.181
S6913 ZZ/2RS	65	90	13	17.4	16	6300	7500	0.196
S6914 ZZ/2RS	70	100	16	23.7	21.2	6000	7000	0.336
S6915 ZZ/2RS	75	105	16	24.3	22.5	5600	6700	0.355
S6916 2RS	80	110	16	24.9	23.9	5300	6300	0.375
S6917 2RS	85	120	16	31.9	29.7	4800	6000	0.507
S6918 2RS	90	125	18	32.8	31.5	4500	5600	0.533
S6919 2RS	95	130	18	33.7	33.3	4300	5300	0.56
S6920 2RS	100	140	20	42.7	41.9	4000	5000	0.77
S6921 2RS	105	145	20	43.9	44.3	3800	4300	0.808
S6922 2RS	110	150	20	43.6	44.4	3600	4500	0.84
S6924 2RS	120	165	22	55	56.9	3200	4000	1.13
S6926 2RS	130	180	24	65.1	67.2	3000	3800	1.496
S6928 2RS	140	190	24	66.6	71.2	2800	3600	1.589